

/ CRISTALLO RETINATO ALIMENTARE

**Structure**

3 layers, braided reinforcement

Applications

Passage of liquid cooling solutions, chemicals, compressed air and other uses in the food and mechanical industry

Material

Suitable for passage of food liquids in compliance with EU 10/2011 for simulants A, B C

Note

Particularly suitable for applications that require resistance to high pressures

Struttura

3 strati, rinforzo retinato

Applicazioni


Passaggio di liquidi di raffreddamento, soluzioni chimiche, aria compressa ed altre applicazioni nell'industria alimentare e meccanica

Materiali

Conforme alle direttive EU 10/2011 per il passaggio di liquidi alimentari per simulanti A, B, C.

Note

Particolarmente indicato per impieghi che richiedano resistenza ad elevate pressioni

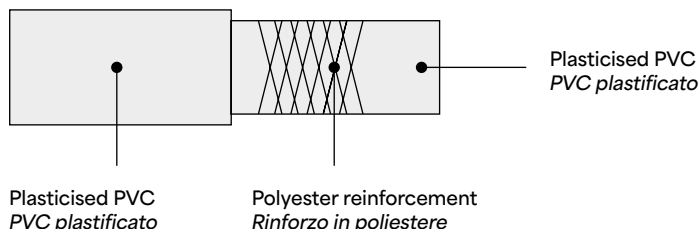

Items available on stock /
Articolo disponibile a magazzino



Code / Codice	Ø internal / interno (mm)	Ø external / esterno (mm)	Weight / Peso (gr)	Length / Lunghezza (m)	W.P. Bar	B.P. Bar	Pall	EAN Code / Codice EAN	€/m
	5	11	92	100	18	54	42		
463210	6	12	104	100	18	54	42	802148 463220 6	
463310	8	14	127	100	18	54	30	802148 463310 4	
	9	15	138	100	18	54	30	Variable / Variabile	
463450	10	16	150	50	18	54	42	802148 463450 7	
	11	17	160	100	12	36	30	Variable / Variabile	
463550	12	17	140	50	12	36	36	802148 463550 4	
	12	18	173	50	12	36	36	Variable / Variabile	
463600	13	19	184	50	12	36	36	802148 463600 6	
463650	15	21	207	50	12	36	30	802148 463650 1	
463700	16	22	219	50	10	30	24	802148 463700 3	
463750	19	26	302	50	10	30	30	802148 463750 8	
463760	22	30	399	50	8	24	20	802148 463760 7	
463850	25	33	445	50	8	24	16	802148 463850 5	
463855	30	39	620	50	8	24	12	802148 463855 0	
	32	42	710	30	8	24	16	Variable / Variabile	
	35	45	780	30	6	18	16	Variable / Variabile	
463870	38	48	820	30	6	18	12	802148 463870 3	